


1280

BALA

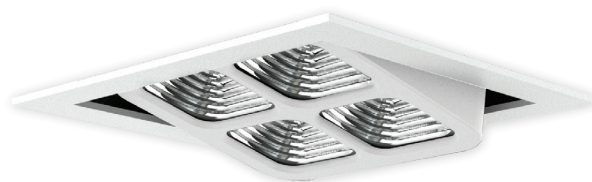

UNIQUE SQUARE
DOUBLE BATWING
LIGHT OUTPUT

SPECIFICATIONS:

1.5 kg	CRI 82+ 3K and 4K	CRI 70+ 5K	144x132	Tilt 25°	SELV	IP20	CE	5 Year warranty	Made in Australia
--------	----------------------	---------------	---------	----------	------	------	----	--------------------	-------------------

CONSTRUCTION & DESIGN

- Recessed LED adjustable downlight
- Trim is constructed in steel and finished in durable polyester powder-coat paint
- Brilliant optical control providing a very high lumen output whilst maintaining an ultra low glare illumination
- Tilt adjustable with wide beam distribution for floodlighting vertical displays

OPTICAL & THERMAL PERFORMANCE

- Heatsink manufactured from custom developed aluminium alloy for better and faster heat dissipation
- Efficient optical control with no harsh cut off and ultra low glare
- Unique square double batwing light output

ELECTRICAL SYSTEM

- Supplied standard with a remote driver (refer to dimming options table)
- All drivers come with quick-connect harness, power cord and plug
- Power factor > 0.9 with active power factor correction
- Input voltage 220-240V, 50/60Hz

TECHNICAL PERFORMANCE

- 28W total system power consumption with overload and short circuit protection
- > 65,000 hours lifespan (L70)
- Premium quality LED Module with high lumen output per watt
- Chromaticity tolerance (MacAdam step) - 2
- Available in 3K, 4K or 5K colour temperature with low colour shift over time
- CRI 90+ is available upon request

CODE ORDERING GUIDE:

PRODUCT CODE / DIM CODE - COLOUR CODE
Example: 1280-3K-28W-01 or 1280-3K-28W/DALI-01

SYSTEM POWER	COLOUR TEMP.	65° BEAM ANGLE	HOT LED LUMENS	LUMINAIRE LUMEN OUTPUT
		PRODUCT CODE		65°
28W	3K	1280-3K-28W	3667	3283
	4K	1280-4K-28W	3805	3382
	5K	1280-5K-28W	3447	3087

DIM CODE	OPTIONS	28W
/DALI	Dali Dimming / Switch Dim	✓
/DSI	Digital Dimming	✓
/AD	Analogue Dimming 1-10V	✓
/DIM	Leading & Trailing edge	Std
	Non-dimmable	x

COLOUR CODE		
-01		Satin White
-06		Matte Black

