

1384

PIXI



OVERALL VIEW

SPECIFICATIONS:

0.3 kg	CRI 82+ 3K and 4K	CRI 70+ 5K	SELV	IP65	CE	5 Year warranty	Made in Australia
--------	----------------------	---------------	------	------	----	--------------------	-------------------

CONSTRUCTION & DESIGN

- Miniature LED fixed exterior wall light or uplight
- Trim constructed from cast AISI 316 stainless steel with machined and mirror polish finish
- Body constructed from cast AISI 316 stainless steel
- Frosted tempered glass flush to trim, durable silicone seals and cable gland provide IP65 weather protection
- Integral constant current controller immune to voltage drop
- Plastic installation well included with each fitting to facilitate installation and maintenance
- This fitting is not submersible

OPTICAL & THERMAL PERFORMANCE

- LED thermal management incorporates conduction to transfer heat rapidly away from LED source with optimal performance
- Soft glow illumination

ELECTRICAL SYSTEM

- **Input voltage 24V DC:** Connects to remote 24V DC power supply (TO BE ORDERED SEPARATELY)
- Supplied with 200mm input cable
- Parallel connection

TECHNICAL PERFORMANCE

- 3.9W total system power consumption with overload and short circuit protection
- >65,000 hours lifespan (L70)
- Premium quality LED Module with high lumen output per watt
- Chromaticity tolerance (macAdam step) - 2
- Available in 3K, 4K or 5K colour temperature with low colour shift over time
- CRI 90+ is available upon request

CODE ORDERING GUIDE: Example: 1384-3K-24V-29

PRODUCT CODE - COLOUR CODE



SYSTEM POWER	COLOUR TEMP.	58° BEAM ANGLE	HOT LED LUMENS	LUMINAIRE LUMEN OUTPUT
				58°
PRODUCT CODE				
3.9W	3K	1384-3K-24V	370	134
	4K	1384-4K-24V	390	141
	5K	1384-5K-24V	383	138

COLOUR CODE


-29 Polished Stainless Steel

INSTALLATION


PVC Recessing TUBE to facilitate installation and maintenance. Supplied with each fitting



WIRING DIAGRAM:

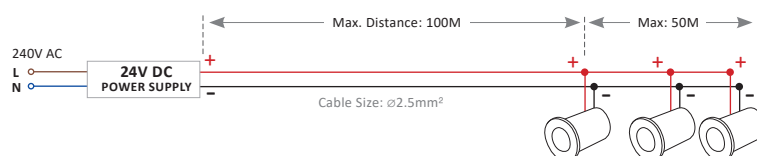

WIRING DIAGRAM FOR 1-10V DIMMING:

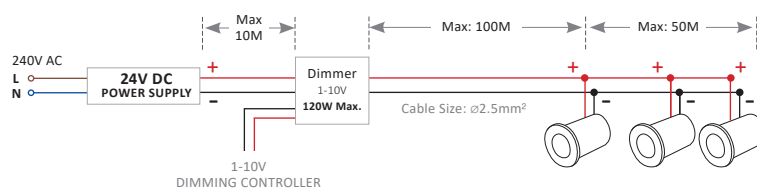

WIRING DIAGRAM FOR DALI:

