


1386

BLAQ

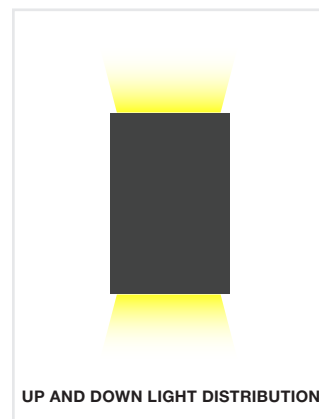

UP AND DOWN LIGHT DISTRIBUTION

SPECIFICATIONS:

Two ways
 1.0 kg
 CB 82+ 3K
 Class I
 IP54
 CE
 5 Year warranty

CONSTRUCTION & DESIGN

- Surface mounted LED exterior wall light
- Constructed in pressure die cast aluminium alloy and finished in durable powder-coat paint
- Unique luminaire designed for both general illumination and for highlighting architectural features
- Up and down light distribution for direct or indirect illumination with low glare
- Clear tempered glass and silicone seals

OPTICAL & THERMAL PERFORMANCE

- Optics and integrated heatsink provides premium optical and thermal performance
- Efficient optical control with no harsh cut off and ultra low glare

ELECTRICAL SYSTEM

- Supplied standard with an integral non-dimmable driver and terminal block
- Input voltage 220-240V, 50/60 Hz

TECHNICAL PERFORMANCE

- 12W total system power consumption with overload and short circuit protection
- >65,000 hours lifespan (L70)
- Premium quality LED Module with high Lumen output per watt
- Chromaticity tolerance (macAdam step) - 2
- Available in 3K or 4K colour temperature with low colour shift over time

CODE ORDERING GUIDE:

PRODUCT CODE - COLOUR CODE

Example: 1386-3K-13W-12

SYSTEM POWER	COLOUR TEMP.	82x92° BEAM ANGLE	HOT LED LUMENS	LUMINAIRE LUMEN OUTPUT
		PRODUCT CODE		82x92°
2x6W	3K	1386-3K-12W	1075	919
	4K	1386-4K-12W	1133	965

COLOUR CODE

-03		Textured White
-12		Dark grey

