


1423

ARIA 168

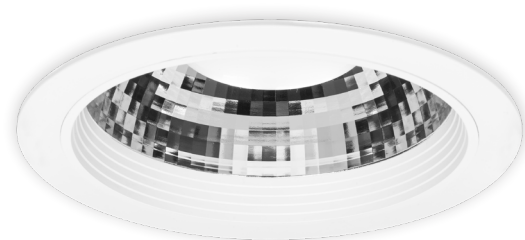

SPECIFICATIONS:

0.5 kg	CRI 82+ 3K and 4K	CRI 70+ 5K	150	SELV	IP44	CE	Available	5 Year warranty	Made in Australia
--------	----------------------	---------------	-----	------	------	----	-----------	--------------------	-------------------

CONSTRUCTION & DESIGN

- Recessed LED downlight
- Trim and housing manufactured from injection moulded polycarbonate and finished in durable polyester powder-coat paint
- Deep faceted pure aluminium reflector
- Polycarbonate frosted diffuser creates a diffused light source for a soft low glare illumination
- Lightweight downlight with low profile heatsink

OPTICAL & THERMAL PERFORMANCE

- Optics and efficient heatsink provides premium optical and thermal performance
- Efficient optical control with no harsh cut off and ultra low glare

ELECTRICAL SYSTEM

- Supplied standard with a remote driver (refer to dimming options table)
- All drivers come with a quick-connect harness, power cord and plug
- Power factor > 0.9 with active power factor correction
- Input voltage 220-240V, 50/60 Hz


TECHNICAL PERFORMANCE

- 8W, 13W, 22W, 28W or 34W total system power consumption with overload and short circuit protection
- >65,000 hours lifespan (L70)
- Premium quality LED Module with high lumen output per watt
- Chromaticity tolerance (MacAdam step) - 2
- Available in 3K, 4K or 5K colour temperature with low colour shift over time
- CRI 90+ is available upon request

CODE ORDERING GUIDE: / -

Example: 1423-3K-8W-01 or 1423-3K-8W/DALI-01

SYSTEM POWER	COLOUR TEMP.	90° BEAM ANGLE	HOT LED LUMENS	LUMINAIRE LUMEN OUTPUT
		PRODUCT CODE		90°
8W	3K	1423-3K-8W	914	694
	4K	1423-4K-8W	947	729
	5K	1423-5K-8W	851	716
13W	3K	1423-3K-13W	1589	1246
	4K	1423-4K-13W	1760	1312
	5K	1423-5K-13W	1578	1280
22W	3K	1423-3K-22W	2533	1874
	4K	1423-4K-22W	2814	1973
	5K	1423-5K-22W	2519	1924
28W	3K	1423-3K-28W	3430	2635
	4K	1423-4K-28W	3752	2773
	5K	1423-5K-28W	3476	2702
34W	3K	1423-3K-34W	4167	3255
	4K	1423-4K-34W	4558	3427
	5K	1423-5K-34W	4099	3358

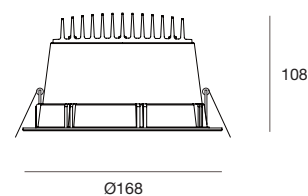

OVERALL VIEW



DIM CODE	OPTIONS	8W	13W	22W	28W	34W
/DALI	Dali Dimming / Switch Dim	✓	✓	✓	✓	✓
/DSI	Digital Dimming	✓	✓	✓	✓	✓
/AD	Analogue Dimming 1-10V	✓	✓	✓	✓	✓
/DIM	Leading & Trailing edge	Std	Std	Std	Std	x
	Non-dimmable	x	x	x	x	Std

COLOUR CODE	Color	Description
-01		Satin White