

1697

# ALTUS RGB DMX

1698



UNIQUE SQUARE  
DOUBLE BATWING  
LIGHT OUTPUT

**SPECIFICATIONS:**

6.0 kg	Class I	IK08	IP65		5 Year warranty	Made in Australia
--------	---------	------	------	--	--------------------	-------------------

**CONSTRUCTION & DESIGN**

- LED exterior RGB adjustable floodlight with DMX control
- Constructed in pressure die cast aluminium alloy and finished in durable powder coated paint
- High performance RGB LED floodlight with excellent illumination and ultra low glare output
- Secure tilt adjustable mechanism for reliable and accurate alignment
- Tempered glass cover
- Stainless steel exposed fasteners
- Three PG9 cable glands for input power, DMX-In and DMX-Out

**OPTICAL & THERMAL PERFORMANCE**

- Components are mounted on custom designed aluminium and die cast housing for optimal heat sinking
- LED thermal management system incorporates both conduction and natural convection to transfer heat rapidly away from the LED source

**ELECTRICAL SYSTEM**

- Supplied completely assembled with integral DMX dimmable driver and Meanwell HLG power supply
- DMX address can be set internally by Dip switches or remotely via a RDM compatible controller
- Power factor > 0.9 with active power factor correction
- Input voltage 220-240, 50/60Hz


**TECHNICAL PERFORMANCE**

- 90W or 120W total system power consumption with overload and short circuit protection
- >50,000+ hours lifespan (L70)
- Available in 3K, 4K or 5K colour temperature with low colour shift over time

**CODE ORDERING GUIDE:**  -

Example: 1697-RGBDMX-90W-03

MAXIMUM SYSTEM POWER	COLOUR TEMP.	55° BEAM ANGLE	HOT LED LUMENS	LUMINAIRE LUMEN OUTPUT
				PRODUCT CODE
90W	RGB		N/A	N/A
120W	RGB		N/A	N/A

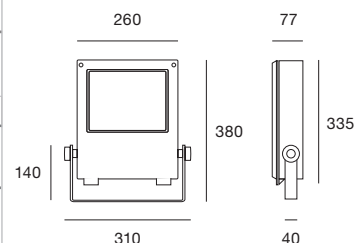

**COLOUR CODE**

-03		Textured White
-07		Textured Black
-11		Textured Silver

**SECURE TILT ADJUSTABLE MECHANISM FOR RELIABLE AND ACCURATE ALIGNMENT**

