

2744

AQUA KAYL

2745



2744
with clear glass



2745
with frosted glass

SPECIFICATIONS:



CONSTRUCTION & DESIGN

- Recessed LED forward throw wall light
- Constructed in AISI 316 stainless steel in brushed finish
- Concealed LED for low glare illumination, can be mounted in any orientation
- Optional block out accessory made from galvabond steel for recessing into concrete or masonry walls
- Built in constant current controller immune to voltage drop

TECHNICAL PERFORMANCE


- 3.9W total system power consumption
- > 65,000 hours lifespan (L70)
- Premium quality LED Module with high lumen output per watt
- Chromaticity tolerance (MacAdam step) - 2
- Available in 3K, 4K or 5K colour temperature with low colour shift over time
- CRI 90+ is available upon request

OPTICAL & THERMAL PERFORMANCE

- Reflector constructed in matte white providing optimal performance and ultra low glare
- LED thermal management incorporates conduction to transfer heat rapidly away from LED source with optimal performance

ELECTRICAL SYSTEM

- **Input voltage 24V:** Connects to remote 24V DC power supply (TO BE ORDERED SEPARATELY)
- Supplied with 200mm Input cable
- Parallel connection

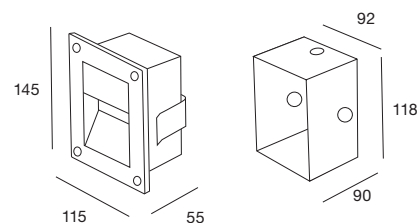

CODE ORDERING GUIDE: Example: 2744-3K-24V-28
2744-3K-24V/DALI-28

PRODUCT CODE	DIM CODE	COLOUR CODE
SYSTEM POWER	COLOUR TEMP.	84x53° BEAM ANGLE
		HOT LED LUMENS
		LUMINAIRE LUMEN OUTPUT
		PRODUCT CODE
		84x53°
3.9W	3K	2744-3K-24V
	4K	2744-4K-24V
	5K	2744-5K-24V
3.9W	3K	2745-3K-24V
	4K	2745-4K-24V
	5K	2745-5K-24V


DIM CODE	OPTIONS	3.9W
/DALI	Dali Dimming / Switch Dim	✓
/DSI	Digital Dimming	✓
/AD	Analogue Dimming 1-10V	✓
	Non-dimmable	Std

COLOUR CODE	OPTIONS
-07	Textured Black
-28	Brushed Stainless Steel


ACCESSORY 890
Block out for recessing into concrete or masonry walls. Made from galvabond steel.



WIRING DIAGRAM:

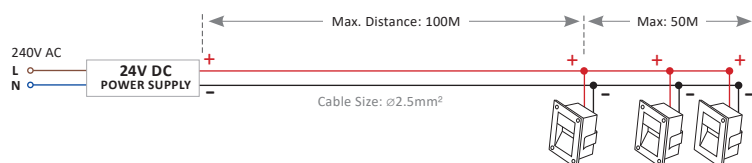

WIRING DIAGRAM FOR 1-10V DIMMING:

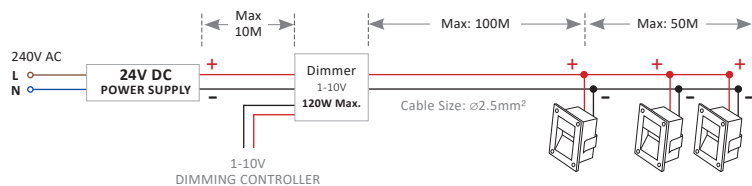

WIRING DIAGRAM FOR DALI:

