# GAP55062 GAP55062

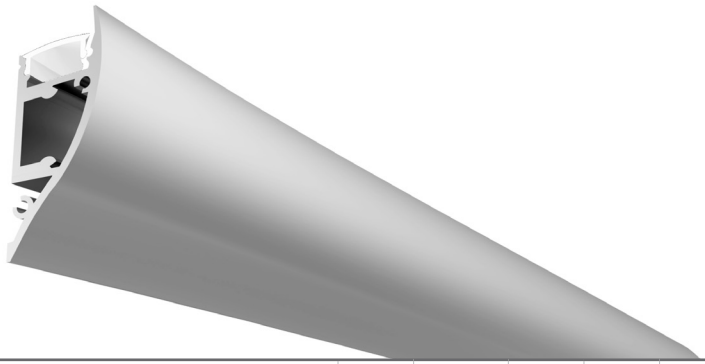

| SPECIFICATIONS: | xx kg/m | 3.2K & 4.2K | | SELV | IP20 | | 5 Year warranty |
|---|---|---|---|---|---|---|---|
| | KG | CRI 82+ | F | III | | CE | |

## CONSTRUCTION & DESIGN

- Wall mount natural anodised aluminium extrusion
- High quality opal matte UV resistant diffuser
- Supplied as standard length (contact sales). Also optional customised length (cutting increments of 50mm)
- For indoor use only

## ELECTRICAL SYSTEM

- Input Voltage 12V or 24V DC
- Connects to remote 12V or 24V DC power supply, to be ordered separately
- Supplied with 2 Core input cable
- Parallel connection

## TECHNICAL PERFORMANCE

- 4.8W, 7.2W, 9.6W, 14.4W or 19.2W LED power consumption per metre
- >65,000 hours lifespan (L70)
- Chromaticity tolerance (MacAdam step)-2
- Available in 3.2K or 4.2K color temperature. Other colour temperatures or CRI available on request
- Maximum run of 5 metres per driver

## DIMENSION

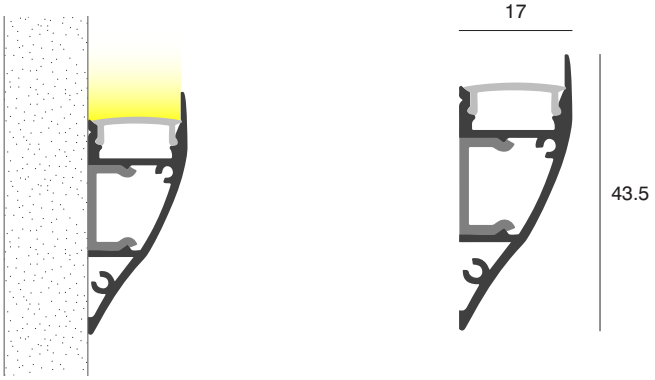


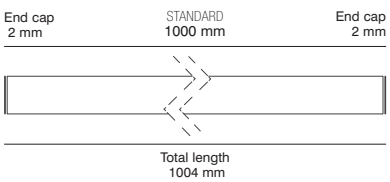


| STANDARD ACCESSORIES | OPTIONAL ACCESSORIES |
|---|---|
| End caps | Steel Mounting Bracket |
|  | N/A |

| COLOUR CODE | | |
|---|---|---|
| -03 | | Textured White |
| -07 | | Textured Black |