


1426

ARIA 215

1427

1428

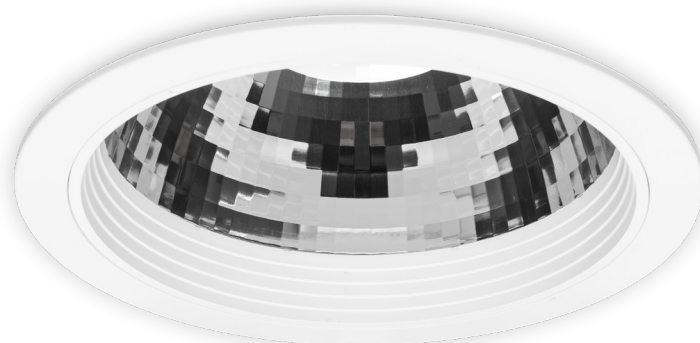

SPECIFICATIONS:

0.9 kg	CRI 82+ 3K and 4K	CRI 70+ 5K	200	SELV	IP44	CE	Available	5 Year warranty	Made in Australia
--------	----------------------	---------------	-----	------	------	----	-----------	-----------------	-------------------

CONSTRUCTION & DESIGN

- Recessed LED downlight
- Trim and housing manufactured from injection moulded polycarbonate and finished in durable polyester powder-coat paint
- Deep faceted pure aluminium reflector
- Polycarbonate frosted diffuser creates a diffused light source for a soft low glare illumination
- Lightweight downlight with low profile heatsink

OPTICAL & THERMAL PERFORMANCE

- Optics and efficient heatsink provides premium optical and thermal performance
- Efficient optical control with no harsh cut off and ultra low glare

ELECTRICAL SYSTEM

- Supplied standard with a remote driver (refer to dimming option table)
- All drivers come with a quick-connect harness, power cord and plug
- Power factor > 0.9 with active power factor correction
- Input voltage 220-240V, 50/60 Hz


TECHNICAL PERFORMANCE

- 22W, 28W or 45W total system power consumption with overload and short circuit protection
- >65,000 hours lifespan (L70)
- Premium quality LED Module with high lumen output per watt
- Chromaticity tolerance (MacAdam step) - 2
- Available in 3K, 4K or 5K colour temperature with low colour shift over time
- CRI 90+ is available upon request

CODE ORDERING GUIDE: / -

Example: 1426-3K-22W-01 or 1426-3K-22W/DALI-01

SYSTEM POWER	COLOUR TEMP.	68° BEAM ANGLE	HOT LED LUMENS	LUMINAIRE LUMEN OUTPUT
		PRODUCT CODE		68°
22W	3K	1426-3K-22W	2533	1872
	4K	1426-4K-22W	2814	1971
	5K	1426-5K-22W	2519	1923
28W	3K	1427-3K-28W	3430	2582
	4K	1427-4K-28W	3752	2711
	5K	1427-5K-28W	3476	2645
45W	3K	1428-3K-45W	5479	3926
	4K	1428-4K-45W	5680	4122



136

OVERALL VIEW



DIM CODE	OPTIONS	22W	28W	45W
/DALI	Dali Dimming / Switch Dim	✓	✓	✓
/DSI	Digital Dimming	✓	✓	✓
/AD	Analogue Dimming 1-10V	✓	✓	✓
/DIM	Leading & Trailing edge	Std	Std	✓
	Non-dimmable	x	x	Std

COLOUR CODE	
-01	Satin White